


| | | | | | | | | | |
|-------|----------------------|------|----------|--------|-------------------|----------------|-----------|------|--------|
| REV # | REVISION DESCRIPTION | DATE | APPROVED | DATE | CALCULATE POLYMER | ACTUAL POLYMER | SHOT TIME | SHOT | APPEED |
| | | | | 24-Mar | 21mL | | | | |

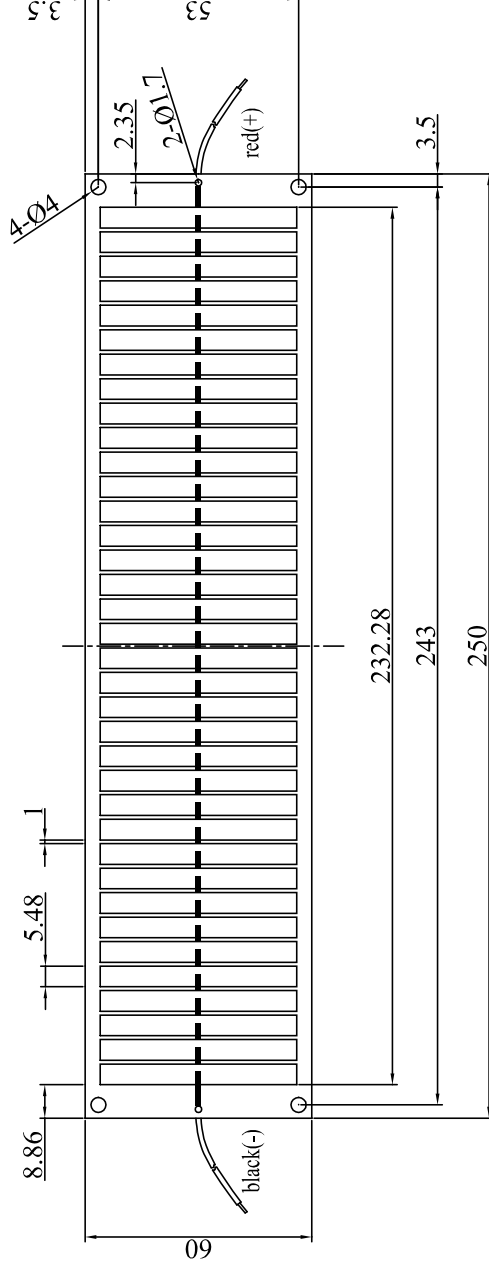

| | | | | |
|-------------------------|----------------------|-----------------------------|------------------|-------------|
| CO/CUSTOMER: | DESCRIPTION/PRODUCT: | STUDIO DEL SOLE INC. | | |
| PRODUCT MODEL: | DWG.NO. | FILENAME: | DWG. BY: | APP. BY: |
| FP-PNL-P180-0089C01 | P100301 REV.01 | PSLM 18.0-89.2 | Peter | 15-Mar-2010 |
| SUBSTRATE: | COLOR: | CABLE AWG#: | LENGTH: | SCALE: |
| CORRUGATE 4.0mm 60X2.50 | TRANSPARENT | AWG#22 | S-WIRE R/B 500mm | 1:2 |
| | SIZE: | UNIT: | | mm |
| | | | | |

| | | | |
|------------------------------|-------|---|-----|
| Spe.tolerance:±10%(VP,lp) | | | |
| Cell:W12CSCNS6CG160B00550520 | | | |
| Cell Efficiency:16.0% | | | |
| MC | 36 | / | pcs |
| Voc | 20.38 | / | V |
| Vp | 18 | / | V |
| mAsc | 98.1 | / | mA |
| mAp | 89.2 | / | mA |
| Wp | 1.6 | / | W |